


HINGED SLAT CHAIN CONVEYOR

The sturdy conveyor




- Designed for conveying sharp-edged parts or transport containers, pallet cages, etc.
- High conveying speeds
- Large point loads possible on the chain

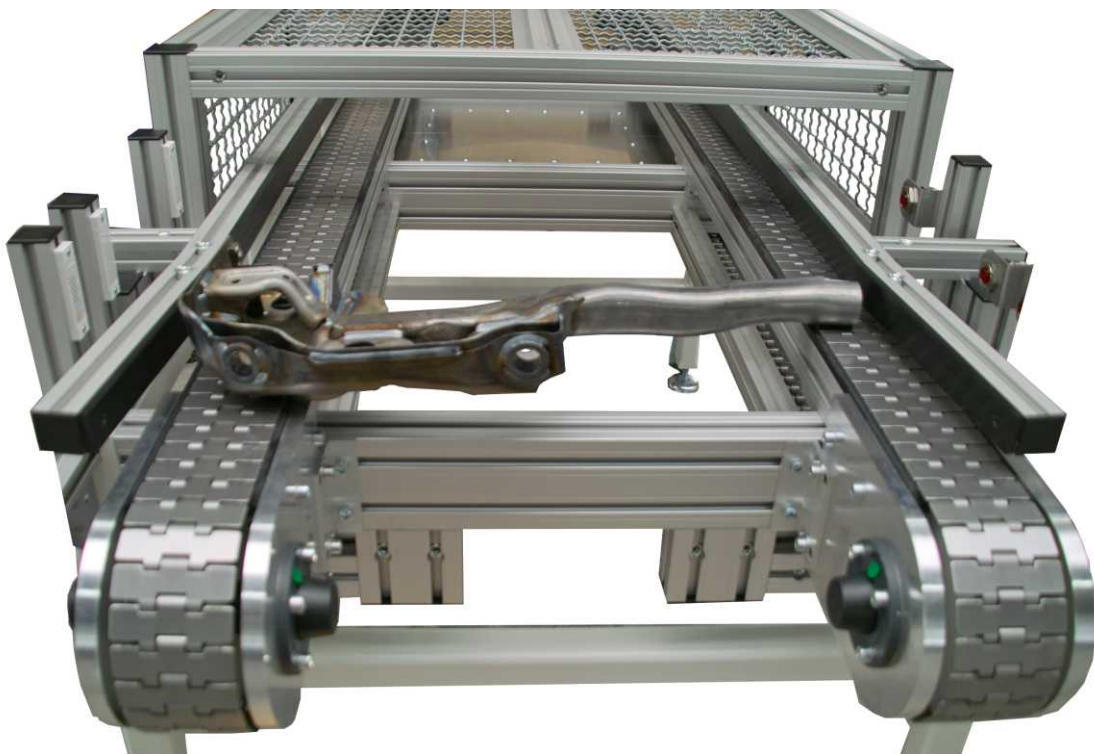

Product features:

Hinged slat chains are distinguished by a large contact area on the chain guidance system. This ensures a high point-load handling capacity for the material to be conveyed.

When using hardened chains, hinged slat chain conveyors are especially well suited for conveying particularly wear-sensitive parts (cast parts, welded components, gear wheels, glass bottles, etc.).

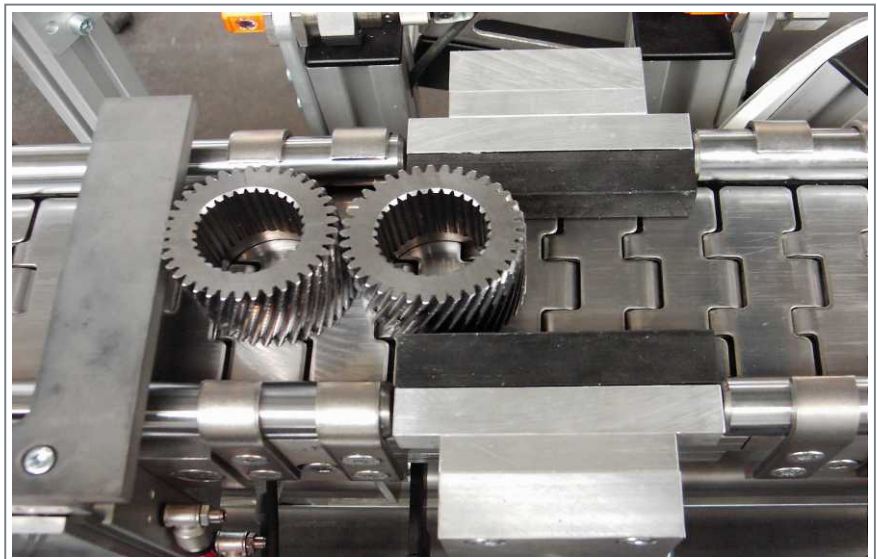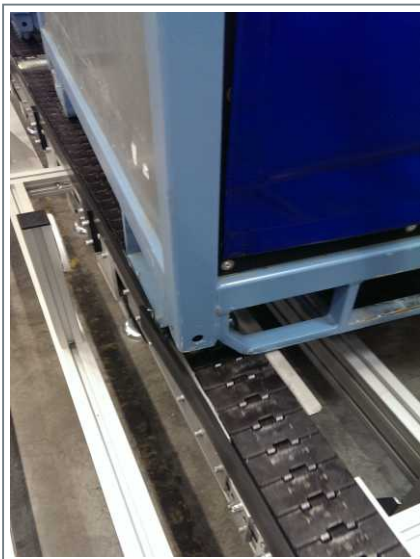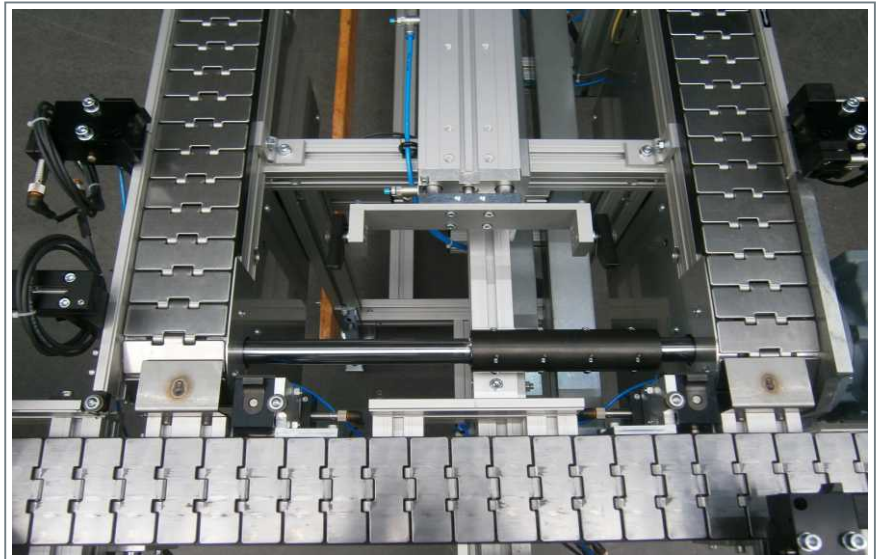

Technical specifications:

Transport media:	Hinged slat chains made of steel or stainless steel, width 101,6 mm
Conveying speeds:	up to max. 80 m/min
Workpiece carrier dimensions:	180 x 180 ... 3 000 x 3 000 mm (other sizes available on request)
WP carrier weight including workpiece:	up to max. 500 kg
WP carrier switchover times:	> 2 sec. (depending on workpiece carrier dimension and weight)

ALTRATEC Automation GmbH
Stuttgart Plant
Am Längenbühl 1
71229 Leonberg
GERMANY
Ph. +49 7152 3 56 56-0
Fax. +49 7152 3 56 56-29
www.altratec.de · info@altratec.de

ALTRATEC Automation GmbH
Chemnitz Plant
Südstraße 9
09221 Neukirchen
GERMANY
Ph. +49 371 28134-0
Fax. +49 371 28134-34
www.altratec.de · info@altratec.de

China Plant
Bachtel Ltd.
Suzhou New District, Suzhou City,
Jiangsu Province
China, PC. 215151
Ph. +86 512 65 36 00 65
Fax. +86 512 65 36 09 06

Certified according to DIN EN ISO 9001